


RANGE 8.B

CORROSION RESISTANT CABINETS FOR ACIDS & BASES

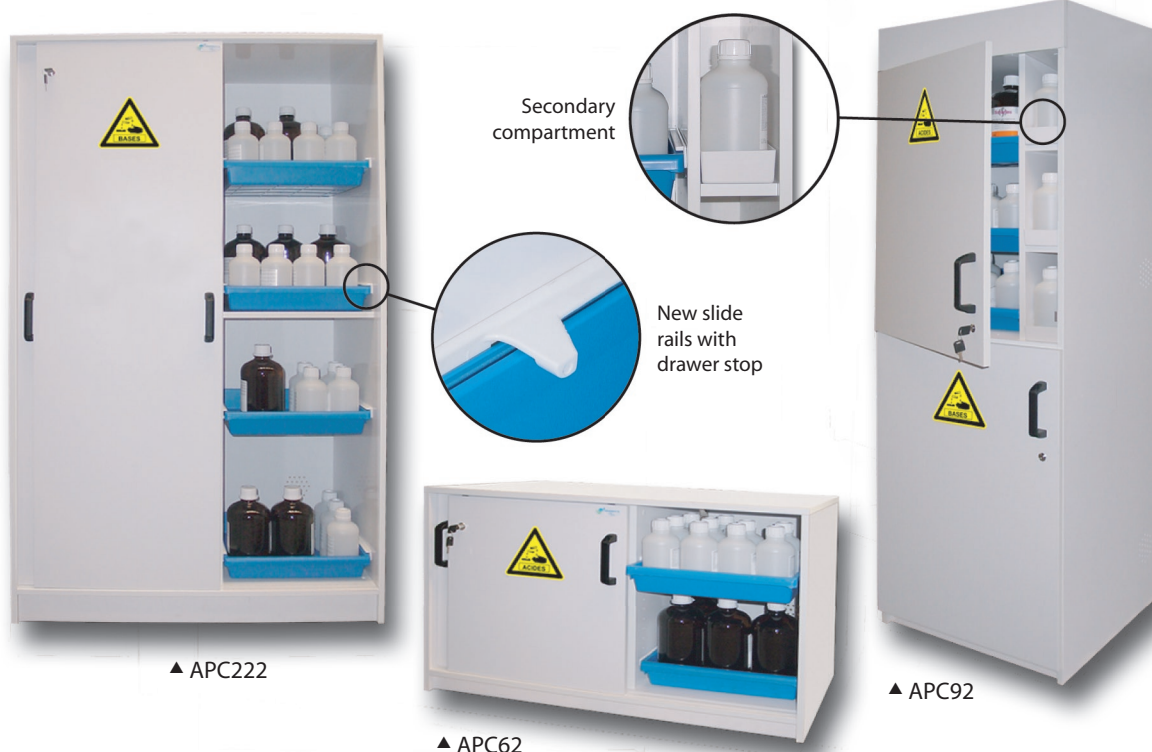

▲ APC222

▲ APC62

▲ APC92

CONFORMITY

- Large warning labels in compliance with ISO 3864, 92/58/CEE European directive and NF X08.003 norm.
- In compliance with recommendations of The National Institute for research and Safety at work (I.N.R.S.).

ADVANTAGES

- Especially designed for acids and bases storage.
- Built in melamine-based wood with a great resistance to corrosive vapours aggressions.
- Cabinets with sliding drawers for acids or/and bases storage.

PASSIVE SECURITY

- Built entirely in white melamine-based wood.
- «Corrosive», «Base» and «Toxic» large warning labels (only the 3 for APC107 model).
- Adjustable retention sliding drawers for each major compartment.
- Independant compartments (except APC32 model) for acid, base or/and toxic products storage (only for APC107 model).
- Each compartment is divided in a major and a secondary storage area (except APC62, APC112 and APC222 models).

ACTIVE SECURITY

- High and low opening vent Ø 100 mm with connecting piece for possible exhaust.
- Door(s) with lock:
- Handling door(s) for APC32, APC92 and APC107 models.
- Sliding doors for APC62, APC112 and APC222 models.
- Adjustable leveling jack feet.

Recycling Air Box Labopur H50

Take advantage of **Labopur's** technology with any safety cabinet. Active coal filters absorption's capacity and filtration system are tested and certified NF X 15-211.



Ref.	External Dim. H x W x D (mm)	Number of compartment		Number of retention		Storage capacity (kg)	Retention capacity (L)	W. (kg)
		Major	Secondary	Drawers in major comp.	Shelves in secondary comp.			
APC32	670 x 635 x 615	1	1	2	2	68	28	35
APC62	670 x 1135 x 615	2	0	4	0	96	44	60
APC92	1850 x 635 x 615	2	2	6	6	150	84	57
APC112	900 x 1135 x 615	2	0	6	0	144	66	80
APC222	1850 x 1135 x 615	2	0	8	0	192	88	124
APC107	1850 x 635 x 615	3	3	5	5	170	70	89
E8A2	Shelf / base trough sliding					20	11	5

(1) The melamine-based wood may be affected by corrosive liquids attacks. Acids and bases bottles must be stored in the HDPE base trough. Moreover, all spills must be quickly cleaned.